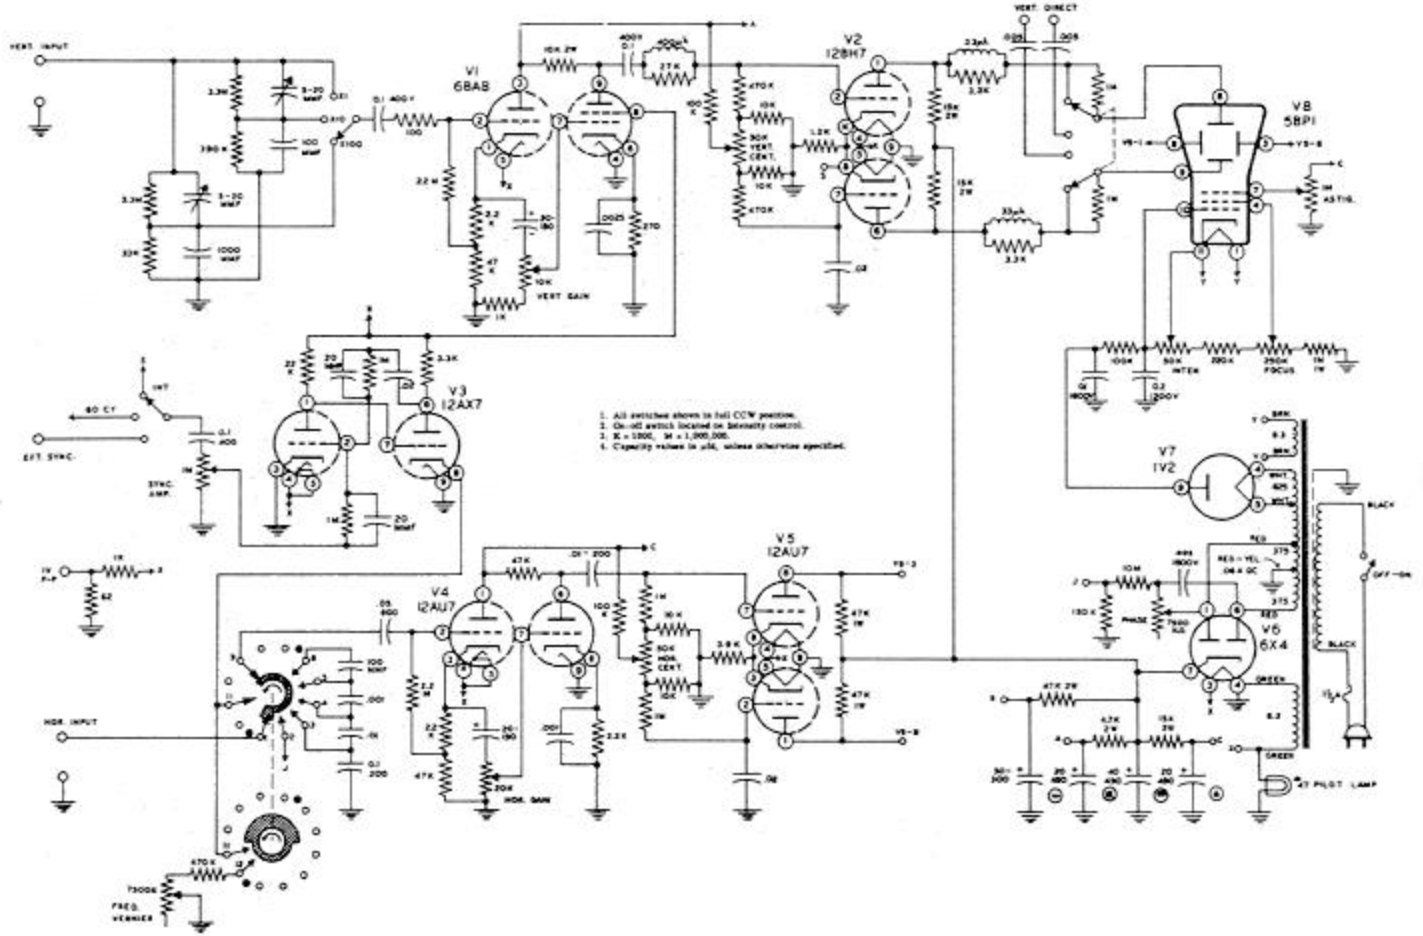
VERT. INPUT
V1
6BA8
V2
12BH7
VERT. DIRECT
V8
5BP1
ASTIG.
VERT. GAIN
V3
12AX7
60 CY
EXT. SYNC.
SYNC. AMP.
V4
12AU7
V5
12AU7
HOR. INPUT
HOR. GAIN
FREQ. VERNIER
V7
1V2
V6
6X4
BLACK
OFF-ON
PHASE
47 PILOT LAMP
1. All switches shown in full CCW position.
2. On-off switch located on intensity control.
3. K = 1000, M = 1,000,000.
4. Capacity values in μfd, unless otherwise specified.